

Voltage Compensation and Fault Current Limiting Using Dynamic Voltage Restorer

¹SAIKAT DEB,

Gandhi Institute of Excellent Technocrats, Bhubaneswar, India

²SOUBHAGYA KUMAR SUNDARA,

Eastern Academy of Science and Technology, Bhubaneswar, Odisha, India

Abstract—This paper proposes a new fault current limiting dynamic voltage restorer concept. The new system has a crowbar bidirectional Thyristor switch across the output terminals of a conventional back-to-back DVR. In the event of a load short, the DVR controller will deactivate the faulty phase of the DVR and activate its crowbar Thyristor to insert the DVR filter reactor into the grid to limit the fault current. A fault condition is detected by sensing the load current and its rate of change. The DVR will operate with different strategies of protection under different fault conditions.

Keywords— *Dynamic voltage restorer, Fault current, voltage compensation, shunt transformer, Crowbar bidirectional circuit*

I. INTRODUCTION

Voltage fluctuations and short circuit faults. With wide use of nonlinear loads, the grid suffers from voltage fluctuation, voltage unbalance, and other power quality problems. At the same time, many power loads become more sensitive to these disturbances [1], [2]. The rapid proliferation of renewable power generation sources in the grid has aggravated these power quality problems [3]–[6]. Furthermore, short-circuit faults remain one of the most common faults in the grid and cause great concerns for grid security and stability.

A solid-state fault current limiter can be used to limit fault currents in the grid [7]–[12]., the solid-state FCL inserts a high series impedance in the power loop and thus effectively limits the fault current if when a short circuit fault occurs. In during normal operation of the grid the FCL operate in a non-load mode, resulting in compromised equipment utilization Efficiency and energy conversion efficiency. Then, a dynamic voltage restorer (DVR) can be used to compensate the grid voltage fluctuations. For manypower systems, it would be tremendously advantage to provide both voltage compensation and fault current.

Limiting functions by a single power electronic equipment. , the strategy control of a conventional DVR is expanded to additional fault current interruption features. , this approach requires a three-fold increase in power rating of the DVR, leading to a sharp increase in system cost.

II. TOPOLOGY AND OPERATION

A DVR is a power electronics switch device that contains of SCR, a capacitance bank as energy memory device and injection transformers. it will be seen that DVR is connected in between the distribution system and therefore the load. The DVR is that by suggests that of associate injecting transformer a bearing voltage is generated by a forced commuted device that is asynchronous to the bus voltage. A

regulated Direct Current voltage supply is provided by a DC capacitance bank that acts associate energy memory device.

Below normal in operation conditions no voltage sag present, DVR provides very minimum magnitude of voltage to atone for the free fall of transformer and device losses. however, if have a voltage sag in the distribution system, DVR can generate a controlled voltage of high magnitude and desired point that ensures that load voltage is uninterrupted and is maintained. During this case the capacitor are discharged to stay the load offer constant.

Note that the DVR capable of generating or riveting reactive power however the reactive power injection of the device should be provided by associate external energy supply or energy storage system. The interval of DVR is incredibly short and is limited by the ability physics devices and therefore the voltage sag detection time.

In this paper, a new concept of fault current limiting dynamic voltage restorer is proposed. The new topology can operate in two operational modes:

- 1) Voltage compensation mode;
- 2) Fault current limiting mode.

The topology of the composed of three single-phase bridges. Each s phase topology mainly comprises of a parallel transformer, a back-to-back power converter, a series transformer, and a crowbar bidirectional Thyristor. The input module inverter of the converter is connected to the grid through a parallel transformer (e.g., T1) with L_z to eliminate the maximum frequency ripples, and rectifies the power from the grid to the dc capacitor. The output module inverter converts the power from the dc capacitor to voltage compensation, and is connected to the grid through a series transformer (e.g., T4) and a LC output filter. The input rectifier module and output inverter module are connected through the dc link capacitor C_d . The bidirectional Thyristor crowbar in every phase is across the output terminals of the output module inverter to provide circuit fault current limiting function. u_s , u_{dc} , u_c , u_{DVR} , and u_l represent the voltage supply, the dc link voltage, the output voltage of the DVR, the output voltage of FCL-DVR on the primary side of the series transformer, and the voltage of point of common coupling (PCC), respectively. I_s represents the supply current, and i_l is the load current. Z_s and Z_l are the equivalent impedances of the grid and the transmission line, respectively.

The significant difference between the new FCL-DVR and an ordinary DVR is the expansion of three crowbar bidirectional thyristors. The crowbar bidirectional Thyristor

for each stage will be deactivated or activated relying upon the task conditions. At the point when the lattice is under typical task, the crowbar bidirectional thyristors is deactivated and the FCL-DVR works in the voltage compensation mode to repay voltage fluctuation when a short circuit fault occurs, the crowbar bidirectional thyristors is activated to insert the output inductor into the main current path through the series transformer. , the insulated gate bipolar transistors (IGBTs) of the pulse width modulation (PWM) inverter will be killed to totally deactivate the inverter. The FCL-DVR in this manner works in the fault current limiting mode. The short circuit fault current can be restricted by L through the crowbar bidirectional Thyristor. The maximum fault current can likewise be controlled by altering the conduction-point of the Thyristor. In this manner, both voltage fluctuation and fault current limiting can be furnished by the FCL-DVR with a similar power rating of a regular DVR.

At the point when a short circuit or a voltage sag happens, the change of supply voltage will impact the strength of dc connect voltage. In the event that the three shunt transformers are delta-associated on the high-voltage side, the voltage change on the low-voltage side is littler than the connection mode. Delta-connection can also suppress the 3rd harmonics caused by the fluctuation of dc link voltage.

MODES OF OPERATION

Voltage Compensation Mode: When FCL-DVR works in the voltage compensation mode, the crowbar bidirectional Thyristor is deactivated. The FCL-DVR works as a conventional DVR, so it can be identical to a voltage controlled voltage source, as appeared in at the point when voltage variance or unbalance happens, FCL-DVR can be controlled as a compensation voltage u_1 , which is in arrangement with the supply voltage. So the load voltage can be kept up, and the power quality can be made strides. The input module of back to back converter is utilized to supply the dc connect voltage.

Fault Current Limiting Mode: When the FCL-DVR works in the Fault current limiting mode, the single-stage equal circuit of FCL-DVR is appeared. At the point when a short out blame happens, the faulty phase of the inverter is deactivated, and the crowbar bidirectional thyristors is activated. Under this condition, the reactor L enters into the framework on the secondary side of the arrangement transformer, so the fault current can be restricted by the reactor. As the supply voltage relatively managed by the arrangement transformer, the information rectifier module of the back to back converter can work

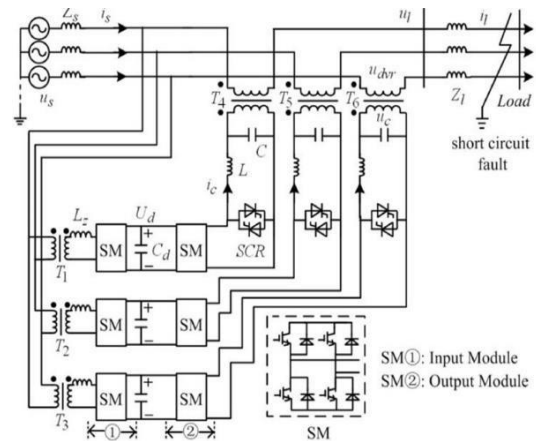


Fig2.

As shown in, in order to eliminate high frequency ripples the L and C are usually resonant at a high frequency, then $n^2\omega_0L = 1/\omega_0C$. Where ω_0 is the fundamental frequency, and n is usually greater than 10. Compared with the equivalent impedance of C , the equivalent impedance of L is very small. So the impact of filter capacitance can be neglected. The equivalent impedance of the secondary side of the series transformer is given by

$$Z_{eq2} = \omega_0 L * \frac{\pi}{2\pi - 2\alpha \sin 2\alpha} (1)$$

Where α is the trigger delay angle of the crowbar thyristors.

III. CONTROL DESIGN

The control block diagram of FCL-DVR is shown in Fig. 4. Shows the control block diagram of the input rectifier module to maintain the dc link voltage. Fig. 4(b) shows the control block diagram of the output inverter module and crow-bar bidirectional Thyristor to carry out voltage compensation and fault current limiting functions


As mentioned before, the FCL-DVR can operate in one of the two operation modes according to the grid state. There are two main aspects that influence the performance of the FCL-DVR: the operation mode switching strategy and fault current detection method. When the FCL-DVR is in the voltage compensation mode, it operates as a conversational DVR. Much work was done on the control methods of DVR [8]–[10], [19]. So we mainly focus on the switching strategy and fault current detection method of the fault current limiting operation mode.

As shown in Fig. 4(a), a control method based on instantaneous value of dc link voltage, input current of PWM rectifier, and PCC voltage is adopted in this paper [20]. Using this control method, a fast response, low steady state error of voltage compensation can be obtained. The three-phase topology is composed of three single phase bridges and each phase can be controlled individually, so the unbalance compensation can be carried out easily.

When a short circuit fault happens (e.g., a three-phase to ground fault) the fault current will be 6–10 times that of the normal load current [17]–[19]. Assuming the fault current in

and the inverter of the fault phase is deactivated. The corresponding crow-bar bidirectional thyristors are activated. In this state, the PWM rectifier of the fault phase operates well to maintain the dc voltage, and it prepares for the recovery of FCL-DVR. When the fault disappears, the grid resumes to normal operation status automatically; and the fault phase of FCL-DVR recovers to voltage compensation mode.

The supply voltage is set at 10 kV with a 1 MW resistive load. The FCL-DVR is designed to compensate a voltage fluctuation of 20% of the supply voltage. The maximum fault current is allowed to be six times of the nominal load current. The parameters are summarized

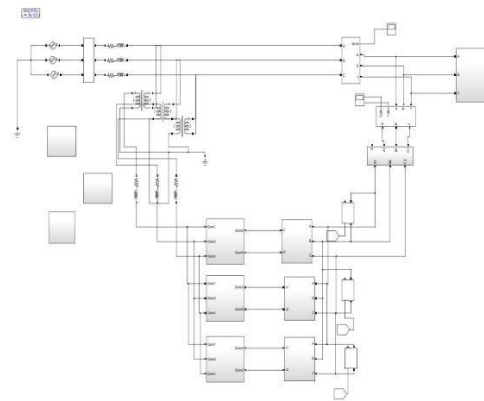[illegible]

Switching Strategy

Case 5: Transient short-circuit faults (i.e., phase to phase short-circuit fault, two-phase to ground fault and three-phase to ground fault) occur. The healthy phase of FCL-DVR operates in voltage compensations mode; the fault phases are in fault current limiting mode. The voltage compensation command of the fault phase is set to zero,

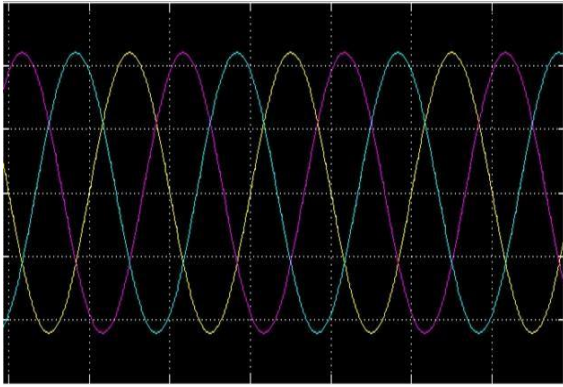


Fig 4.3

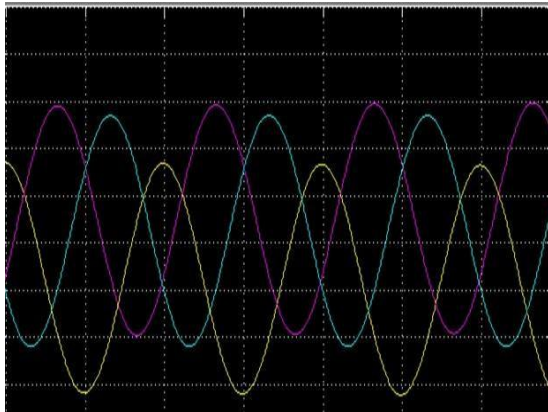


Fig 4.4

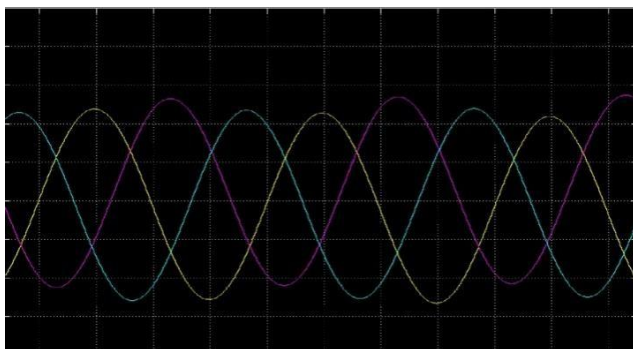


Fig 4.5

In the above represented pictures Fig 4.1 is the whole setup of the simulation. In the Fig 4.2 represent the proportional integral controller of the simulation. In the Fig 4.3 is the normal voltage without any fluctuations. In the next picture 4.4 indicates the voltage with voltage with fluctuation. In the final figure Fig 4.5 indicates FCL DVR can compensates the voltage and fluctuations.

V. CONCLUSION

The new method uses a conventional back-to-back DVR with crowbar bidirectional Thyristor switch across the output terminals. In the load short event, the DVR controller will stop function of the faulty phase of the DVR and crowbar thyristors activate limit the fault current against DVR filter. The FCL-DVR will operate with different types of strategies under different conditions of fault.

1) The crowbar bidirectional thyristors between the output sides of the inverter, the new FCL-DVR is done voltage compensation and limiting fault current.

- 2) The FCL-DVR can be used to help against various types of short faults with some non-fault phases. The FCL-DVR and power rating and conventional DVR. Power rating are same.
- 3) Mode should be delta connection, the shunt transformers minimize the dc link voltage fluctuations and suppresses the third harmonics.
- 4) The new control method can easily detect faults.

REFERENCES

- [1] Z. Shuaib et al., "A dynamic hybrid var compensator and a two-level collaborative optimization compensation method," *IEEE Trans. Power Electron.*, vol. 24, no. 9, pp. 2091–2100, Sep. 2009.
- [2] L. Sainz, J. J. Mesas, R. Teodorescu, and P. Rodriguez, "Deterministic and stochastic study of wind farm harmonic currents," *IEEE Trans. Energy Convers.*, vol. 25, no. 4, pp. 1071–1080, Dec. 2010.
- [3] F. Boico and B. Lehman, "Multiple-input maximum power point tracking algorithm for solar panels with reduced sensing circuitry for portable applications," *Solar Energy*, vol. 86, no. 1, pp. 463–475, Jan. 2012.
- [4] R. F. Arritt and R. C. Dugan, "Distribution system analysis and the future smart grid," *IEEE Trans. Ind. Appl.*, vol. 47, no. 6, pp. 2343–2350, Nov. 2011.
- [5] U. Supatti and F. Z. Peng, "Z-source inverter with grid connected for wind power system," in *Proc. Energy Convers. Congr. Expo. (ECCE)*, San Jose, CA, USA, 2009, pp. 398–403.
- [6] M. H. Ali and B. Wu, "Comparison of stabilization methods for fixed-speed wind generator systems," *IEEE Trans. Power Del.*, vol. 25, no. 1, pp. 323–331, Jan. 2010.
- [7] R. K. Smith et al., "Solid state distribution current limiter and circuit breaker: Application requirements and control strategies," *IEEE Trans. Power Del.*, vol. 8, no. 3, pp. 1155–1162, Mar. 1993.
- [8] M. S. Atmadji and J. G. J. Sloot, "Hybrid switching: A review of current literature," in *Proc. Energy Manage. Power Del. (EMPD)*, Singapore, 1998, pp. 683–688.
- [9] Abramovitz and K. M. Smedley, "Survey of solid-state fault current limiters," *IEEE Trans. Power Electron.*, vol. 27, no. 6, pp. 2770–2782, Jun. 2012.
- [10] R. Fereidouni, B. Vahidi, and T. H. Mehr, "The impact of solid state fault current limiter on power network with wind-turbine power generation," *IEEE Trans. Smart Grid*, vol. 4, no. 2, pp. 1188–1196, Jun. 2013.
- [11] Ali, A. Nazar. "Cascaded Multilevel Inverters for Reduce Harmonic Distortions in Solar PV Applications." *Asian Journal of Research in Social Sciences and Humanities* 6.Issue : 11 (2016): 703-715.
- [12] Ali, A. Nazar. "A Single phase Five level Inverter for Grid Connected Photovoltaic System by employing PID Controller." *African journal of Research* 6.1 (2011): 306-315.
- [13] Ali, A. Nazar. "A SINGLE PHASE HIGH EFFICIENT TRANSFORMERLESS INVERTER FOR PV GRID CONNECTED POWER SYSTEM USING ISPWM TECHNIQUE." *International Journal of Applied Engineering Research* 10.ISSN 0973-4562 (2015): 7489-7496.
- [14] Ali, A. Nazar. "Performance Enhancement of Hybrid Wind/Photo Voltaic System Using Z Source Inverter with Cuk-sepic Fused Converter." *Research Journal of Applied Sciences, Engineering and Technology* 7.ISSN: 2040-7459; (2014): 3964-3970.
- [15] Ali, A. Nazar. "Ride through Strategy for a Three-Level Dual Z-Source Inverter Using TRIAC." *Scientific Research publication* 7.ISSN Online: 2153-1293 (2016): 3911-3921.
- [16] Ali, A. Nazar. "An ANFIS Based Advanced MPPT Control of a Wind-Solar Hybrid Power Generation System." *International Review on Modelling and Simulations* 7.ISSN 1974-9821 (2014): 638-643.
- [17] Nazar Ali, A. "Performance Analysis of Switched Capacitor Multilevel DC/AC Inverter using Solar PV Cells." *International Journal for Modern Trends in Science and Technology* 3.05 (2017): 104-109.
- [18] Ali, A. Nazar. "FPGA UTILISATION FOR HIGH LEVEL POWER CONSUMPTION DRIVES BASED ON THREE PHASE SINUSOIDAL PWM -VVVF CONTROLLER." *International Journal of Communications and Engineering* 4.Issue: 02 (2012): 25-30.
- [19] Ali, A. Nazar. "A SINGLE PHASE HIGH EFFICIENT TRANSFORMERLESS INVERTER FOR PV GRID CONNECTED POWER SYSTEM USING ISPWM TECHNIQUE." *International Journal of Applied Engineering Research* 10.ISSN 0973-4562 (2015): 7489-7496.
- [20] JAIGANESH, R. "Smart Grid System for Water Pumping and Domestic Application using Arduino Controller." *International Journal of Engineering Research & Technology (IJERT)* 5.13 (2017): 583-588.

- [21] Paul, M. Mano Raja, R. Mahalakshmi, M. Karuppasampandian, A. Bhuvanesh, and R. Jai Ganesh. "Classification and Detection of Faults in Grid Connected Photovoltaic System."
- [22] Ganesh, Rajendran Jai, et al. "Fault Identification and Islanding in DC Grid Connected PV System." Scientific Research Publishing 7.Circuits and Systems, 7, 2904-2915. (2016): 2904-2915.
- [23] Jaiganesh, R., et al. "Smart Grid System for Water Pumping and Domestic Application Using Arduino Controller." International Journal for Modern Trends in Science and Technology 3.05 (2017): 385-390.
- [24] Kalavalli, C., et al. "Single Phase Bidirectional PWM Converter for Microgrid System." International Journal of Engineering and Technology (IJET) ISSN : 0975-4024 Vol 5 No 3 Jun-Jul 2013.
- [25] Lilly Renuka, R., et al. "Power Quality Enhancement Using VSI Based STATCOM for SEIG Feeding Non Linear Loads. " International Journal of Engineering and Applied Sciences (IJEAS) ISSN: 2394-3661, Volume-2, Issue-5, May 2015.
- [26] Karthikeyan, B. JEBASALMA. "RESONANT PWM ZVZCS DC TO DC CONVERTERS FOR RENEWABLE ENERGY APPLICATIONS ." International Journal of Power Control and Computation (IJPCSC) Vol 6. No.2 – Jan-March 2014 Pp. 82-89. gopalax Journals, Singapore available at : www.ijcns.com ISSN: 0976-268X.
- [27] Gowri, N., et al. "Power Factor Correction Based Bridgeless Single Switch SEPIC Converter Fed BLDC
- [28] Motor." ADVANCES in NATURAL and APPLIED SCIENCES. ISSN: 1995-0772 AENSI Publication EISSN: 1998-1090 [http://www.aensiweb.com/ANAS2016 March 10\(3\): pages 190-197](http://www.aensiweb.com/ANAS2016 March 10(3): pages 190-197).
- [29] Ramkumar, R., et al. "A Novel Low Cost Three Arm Ac Automatic Voltage Regulator" ADVANCES in NATURAL and APPLIED SCIENCES ISSN: 1995-0772 AENSI Publication EISSN: 1998-1090 [http://www.aensiweb.com/ANAS2016 March 10\(3\): pages 142-151](http://www.aensiweb.com/ANAS2016 March 10(3): pages 142-151).
- [30] Kodeeswaran, S., T. Ramkumar, and R. Jai Ganesh. "Precise temperature control using reverse seebeck effect." In Power and Embedded Drive Control (ICPEDC), 2017 International Conference on, pp. 398-404. IEEE, 2017.
- [31] Subramanian, A. T. Sankara, P. Sabarish, and R. Jai Ganesh. "An Improved Voltage follower Canonical Switching Cell Converter with PFC for VSI Fed BLDC Motor." *Journal of Science and Technology (JST)* 2, no. 10 (2017): 01-11.
- [32] Murugesan, S. R. Senthikumar. "DESIGN OF SINGLE PHASE SEVEN LEVEL PV INVERTER USING FPGA." International Journal of Emerging Technology in Computer Science & Electronics, 2016, Vol.20, No.2, pp.207-2012.
- [33] S. Murugesan, C. Kalavalli, " FPGA Based Multilevel Inverter With Reduce Number of Switches For Photovoltaic System", International Journal of Scientific Research in Science, Engineering and Technology (IJSRSET), Print ISSN : 2395-1990, Online ISSN : 2394-4099, Volume 3 Issue 6, pp.628-634, September-October 2017.
- [34] Vikram, A. Arun, R. Navaneeth, M. Nareesh Kumar, and R. Vinoth. "Solar PV Array Fed BLDC Motor Using Zeta Converter For Water Pumping Applications." *Journal of Science and Technology (JST)* 2, no. 11 (2017): 09-20.
- [35] Nagarajan, L. Star Delta Starter using Soft Switch for Low Power Three Phase Induction Motors. *Australian Journal of Basic and Applied Sciences*, 9(21), 175-178.
- [36] Vinusha, S., & Nagarajan, L. (2015). CURRENT SOURCE INVERTER FED INDUCTION MOTOR DRIVE USING MULTICELL CONVERTER WITH ANFIS CONTROL.
- [37] Nagarajan, L., & Nandhini, S. (2015). AN EFFICIENT SOLAR/WIND/BATTERY HYBRID SYSTEM WITH HIGH POWER CONVERTER USING PSO.
- [38] Subramanian, A. T. Sankara, P. Sabarish, and R. Jai Ganesh. "An Improved Voltage follower Canonical Switching Cell Converter with PFC for VSI Fed BLDC Motor." *Journal of Science and Technology (JST)* 2.10 (2017): 01-11.
- [39] Compensator, D. S. (2015). AN ADAPTIVE CONTROL AND IMPROVEMENT OF POWER QUALITY IN GRID CONNECTED SYSTEM USING POWER ELECTRONIC CONVERTERS.
- [40] Sabarish, P., Sneha, R., Vijayalakshmi, G., & Nikethan, D. (2017). Performance Analysis of PV-Based Boost Converter using PI Controller with PSO Algorithm. *Journal of Science and Technology (JST)*, 2(10), 17-24.
- [41] T. Vishnu Kumar, V. Suresh Kumar, T. Sumeet, M. Srimaha "Hybrid Front end Interface DC-DC Converter with ANFIS Based Control of EMS System". International Journal of Scientific Research in Science and Technology, Volume 3, Issue 8, Print ISSN: 2395-6011, 2017.
- [42] T. Vishnu kumar, V. Suresh Kumar, A new approach to front end interface DC-DC converter" International Journal of Multidisciplinary Research and Modern Education (IJMRME) ISSN(online): 2454-6119 Volume I, Issue II, 2015
- [43] V. Suresh kumar, T. Vishnu kumar, A certain investigation for the battery charging system" International Journal of Multidisciplinary Research and Modern Education (IJMRME) ISSN(online): 2454-6119 Vol.1 Issue.1 2015.
- [44] S. Enimai, S. Jayanthi, T. Vishnu kumar Isolated Power System Design Using Modified P&O Technique" Middle-East Journal of Scientific Research 24 (S2): 150-156, 2016, ISSN 1990-9233