

AUTOMATIC TOLLGATE SYSTEM AND MART TRANSPORTATION USING THE INTERNET OF THINGS (IOT)

Dr. C. Sunil Kumar¹ Mr. Sumanta Kumar Singh² Department of Computer Science & Engineering
Raajdhanni Engineering College

Abstract:

In the present time vehicles are huge in number, the tollgate appears to become bottleneck to go through the doors because of their manual activities. This cycle might require few moments to pass the cost framework. To diminish this progressing time, we chose to computerize the course of cost framework by doing innovation enablement of Web of Things (IoT). Computerized Cost Assortment Framework utilized for gathering charge consequently. In this we do the recognizable proof with the assistance of radio recurrence. A vehicle will hold a RFID tag. This tag is only special recognizable proof number doled out. This will be doled out by RTO or traffic overseeing authority. As vehicles don't need to stop in a line, it guarantees efficient, fuel preservation. This work would diminish the manual work and thus would make the death of the vehicles a lot quicker when contrasted with conventional cost framework and furthermore present distinguishing proof framework for vehicles against which taken and mishap cases. Keywords: RFID, Internet of Things (IoT).

I. INTRODUCTION

Automation has made its way into our lives and is slowly seeping to our lifestyle. We see wide spectra of places where this can be used for the betterment of the society. The number of vehicles on the road is increasing at an alarming rate because of which the condition of the roads is worsening quickly. Then major roads have manual toll systems, where every vehicle has to stop and pay for toll tax and then leave the lane. With enormous increase in number of vehicles on road, the process of traditional toll system has become worst and at times on popular routes the waiting times of vehicles is significantly high. So the objective was to give a solution of this delayed manual toll system by designing and implementing an automatic tolling framework for gathering toll. The system, which is better in terms of accuracy, efficiency and cost effectiveness with lesser delay for vehicles. So such systems are the need of society now a day's to speed up the toll passage process.

In our day to day life, we pay certain amount of tax through toll plaza to the government. The toll gates are mostly found on national highways and bridges etc., and we pay standing over a queue in the form of cash, although, the mobility of vehicles gets interrupted by this method which takes longer travel time, more consumption of fuel and also pollution level get increased in that region, instead of that the method commonly used by industries and in advanced countries is the Electronic Toll Collection System. Electronic toll collection system is the technology that enables the automatic electronic toll collection from the wallet account registered on the name of vehicle owner, determining whether the vehicle is registered or not and informs the toll authorities avoiding toll violations. Over last decades, electronic toll collection system has been implemented in United States and many other countries with a new improvement in it.

Considering the present toll collection system where each vehicle has to stop and pay taxes. Suppose the manual toll collection system is very efficient then for one vehicle to stop and pay taxes total time taken is 60 seconds. And suppose 100 vehicles cross the toll plaza. Then, time taken by 1 vehicle with 60 second average stop in a month is: $60 \times 30 = 1800$ seconds Yearly total time taken = $1800 \times 12 = 216200$ seconds = 6.0 hours On average each vehicle that passes through the toll plaza has to wait 6.0 hours in engine start condition yearly. The figure is staggering if on an average we take 100 vehicles pass through the toll plaza each day, then yearly 36000 vehicles pass through the toll plaza. And each year 36000 vehicles just stand still for 6.0 hours in engine start condition thereby aiding pollution and wasting fuel and money. This study is if the system is very efficient but what if the vehicle has to wait for 5 minutes? This is a figure considering one toll plaza. If considering 50 toll systems the above figure will drastically increase and the wastage of fuel, money will increase and pollution will also increase.

II. RELATEDWORKS

An electronic toll collection system (ETC) that automatically deducts tolls from prepaid account. ETC system uses the dedicated short-range communications (DSRC) technology by semi-passive RFID at frequency of 5.8 GHz in order to communicate between the transceiver called the road side unit (RSU) and the transponder called the on board unit (OBU)[1], Sensors placed in the tank which continuously informs the water level at the current time. This information will ATCSR is an Automated Toll Collection System using RFID used for collecting tax automatically. In this we do the identification with the help of radio frequency. A vehicle will hold an RFID tag. This tag is nothing but unique identification number assigned. This will be assigned by RTO or traffic governing authority. In accordance with this number we will store, all basic information as well as the amount he has paid in advance for the TOLL collection [2]. focused on how the electronic toll collection system reduces manual work load using RFID technology. Ultimately, this system reduces environment pollution due to the burning of fuel as well as reduces the waiting time of users in toll queue. Users can access the website and may perform their toll transaction from any location. Their transaction will reflect in the centralized database. Due to the use of online transaction, users do not need to carry cash with them. This leads in the reduction of human error occurring at the toll booths[3].

III. PROPOSED METHODOLOGY

With the significant development in Roadways, there is an increase in the number of toll plazas. These toll plazas have long queues and the time consumed in paying cash and returning change causes all the more delay. We have designed an IOT based Toll booth Manager System in which a person can use an RFID to pay the Toll charge. When the RFID is swiped, the system would check if it has sufficient balance and then deduct the toll charge and update the balance through IOT.

Internet The automatic toll e-ticketing system is the approach used for the, Vehicle when it reaches the toll plaza, this is detected by using RF ID is used to read each vehicle with the help of RF ID receiver. This then transmits the vehicle number through the RF ID transmitter located in vehicle. We assume that vehicles have identification numbers. The read the signal and information about vehicles owners. These RF signals are received by an RF receiver at the toll plaza, which send data to a computer's parallel port. A software program running on the computer retrieves vehicle details from its vehicle database.


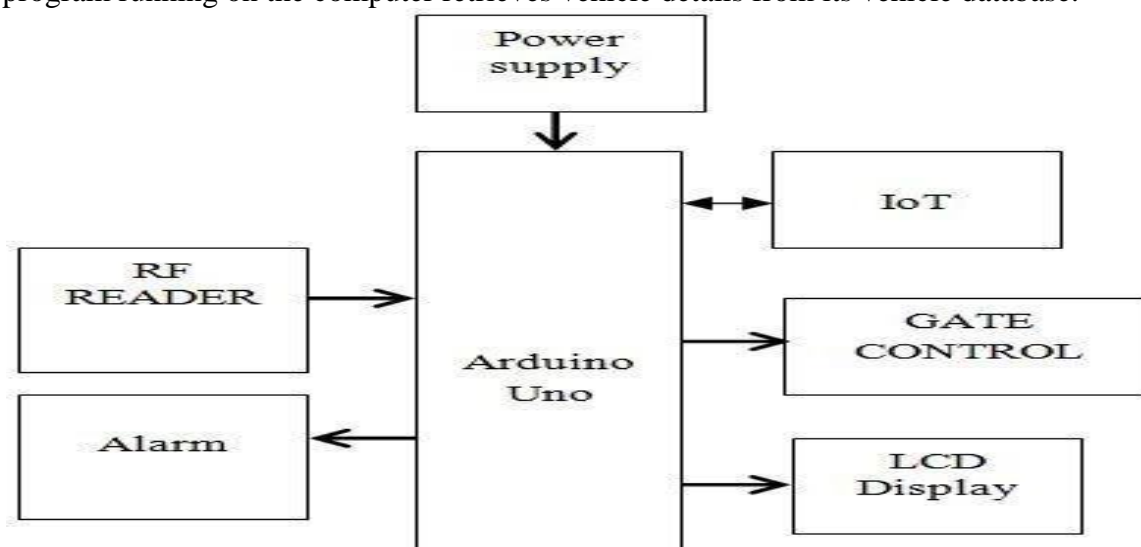


Figure: Proposed System Block Diagram

MONITORING SYSTEM GLOBAL MONITORING

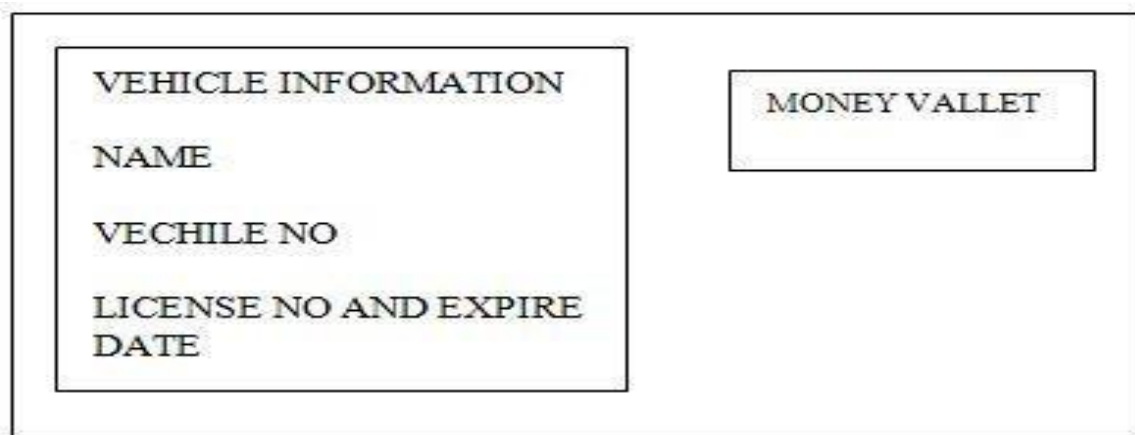

Depending on this information, appropriate toll tax is deducted from the pre-paid account of the vehicle's owners

.The owner receives an SMS message on his/her mobile about the details of the payment. If the balance in the owner's account is low or if the vehicle is not equipped with an RF system, the toll gate remains close. Next method proposes a very simple method for enhancing the performance of infrared electronic-toll-collection systems, in such a case, the vehicle owner will have to recharge the toll collect thereceipt.

On the other side, if any vehicle owner registers a complaint to RTO office regarding theft of the vehicle, that vehicles ID is flagged in the stolen vehicle database. When a vehicle with same ID approaches at toll plaza, system identifies the stolen vehicle and informs the authorities

IV. HARDWARE REQUIREMENT ARDUINO UNO

The Uno is a microcontroller board based on the ATmega328P. It has 14 digital input/output pins (of which 6 can be used as PWM outputs), 6 analog inputs, a 16 MHz quartz crystal, a USB connection, a power jack, an ICSP header and a reset button. It contains everything needed to support the microcontroller; simply connect it to a computer with a USB cable or power it with a AC-to-DC adapter or battery to get started.. You can tinker with your UNO without worrying too much about doing something wrong, worst case scenario you can replace the chip for a few dollars and start over again.

"Uno" means one in Italian and was chosen to mark the release of Arduino Software (IDE) 1.0. The Uno board and version 1.0 of Arduino Software (IDE) were the reference versions of Arduino, now evolved to newer releases. The Uno board is the first in a series of USB Arduino boards, and the reference model for the Arduino platform; for an extensive list of current, past or outdated boards see the Arduino index of boards.



Figure: Arduino Uno INTERNET OF THINGS

The ESP8266 is a low-cost Wi-Fi microchip with full TCP/IP stack and microcontroller capability produced by Shanghai-based Chinese manufacturer, Espressif Systems The chip first came to the attention of western

makers in August 2014 with the ESP-01 module, made by a third-party manufacturer, Ai-Thinker. This small module allows microcontrollers to connect to a Wi-Fi network and make simple TCP/IP connections using Hayes-style commands. However, at the time there was almost no English-language documentation on the chip and the commands it accepted. The very low price and the fact that there were very few external components on the module which suggested that it could eventually be very inexpensive in volume, attracted many hackers to explore the module, chip, and the software on it, as well as to translate the Chinese documentation. The ESP8265 is an ESP8266 with 1 MiB of built-in flash, allowing for single-chip devices capable of connecting to Wi-Fi.

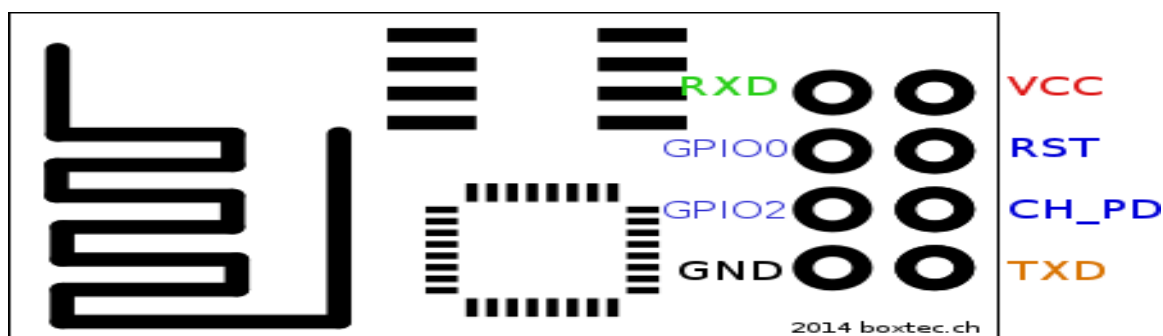


FIGURE: ESP8266 AND PIN DIAGRAM

a tag embedded within a self-adhesive wafer-thin label than can be printed and applied to objects. In addition to a tags automatic identification and data capture capabilities, RFID tags or labels can also provide the Electronic Article Surveillance (EAS) function a case of single technology taking the place of two. EAS is the means by which items in a retail environment are protected from theft typically they are deactivated at the point of purchase to prevent exit alarms from activating. An RFID tag can work just like a barcode in other words, it can hold a unique article number which works like a “licence plate”, calling the information relating to that number from a separate database. But because it can contain a relatively large amount of digital data, the RFID tag can hold source information itself, as opposed to a mere “look- up” number, thus making it infinitely more useful for supply chain and many other applications. In addition, RFID “readers” in a read-write system are also “writers”: that means information can be written to tags at any point in, for instance, a supply chain, a security and access procedure or a maintenance operation, using a hand-held or fixed reader. With a barcode system, the only way of changing information is to print a new barcode or alter information in the system’s database.

Features

- Integrated low power 32-bit MCU
- Integrated TCP/IP protocol stack
- Integrated TR switch, balun, LNA, power amplifier and matching network
- 802.11 b/g/n WiFi 2.4 GHz, support WPA/WPA2
- Support STA/AP/STA+AP operation modes
- 10-bit ADC, SDIO 2.0, (H) SPI, UART, I2C, I2S, IR Remote Control, PWM, GPIO

RADIO FREQUENCY IDENTIFICATION(RFID).

Radio Frequency Identification (RFID) is a fast and reliable means of automatically identifying and logging just about anything, including retail items, vehicles, documents, people, components, library books and works of art. Because it makes use of radio waves, there is no need for “line of sight” reading of information, which is one of the limitations associated with barcode systems. It means RFID tags can be embedded in packaging or, in some cases, in the goods themselves – in addition, an RFID system can, in many cases, read hundreds of tags at the same time. A basic RFID system consists of:

Reader – this may be an industrial portal for supply chain applications or could be a piece of furniture in a library application essentially it is equipment that sends and receives the radio signals.

Antenna – connected to the reader, and usually embedded as part of the same equipment, is one more antennae. The reader uses the antennae to convert digital signals into radio waves and vice versa.

Tag or smart label – the tag is the final component, which consists of a small piece of silicon (the intelligence and memory) and an antenna. Tags can be packaged in many formats, however, the most common format is the smart label


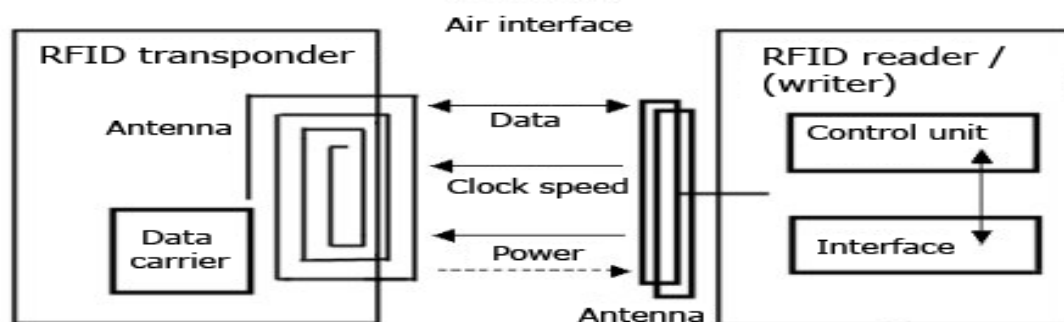


Figure: Radio Frequency Identification DC MOTOR

Whenever a robotics hobbyist talk about making a robot, the first thing comes to his mind is making the robot move on the ground. And there are always two options in front of the designer whether to use a DC motor or a stepper motor. When it comes to speed, weight, size, cost... DC motors are always preferred over stepper motors. There are many things which you can do with your DC motor when interfaced with a microcontroller. For example you can control the speed of motor, you can control the direction of rotation, you can also do encoding of the rotation made by DC motor i.e. keeping track of how many turns are made by your motors etc. So you can see DC

Usually H-bridge is proffered way of interfacing a DC motor. These days many IC manufacturers have H-bridge motor drivers available in the market like L293D is most used H-Bridge driver IC. H-bridge can also be made with the help of transistors and MOSFETs etc. rather of being cheap, they only increase the size of the design board, which is sometimes not required so using a small 16 pin IC is preferred for this purpose.

V. IMPLEMENTATION RESULTS

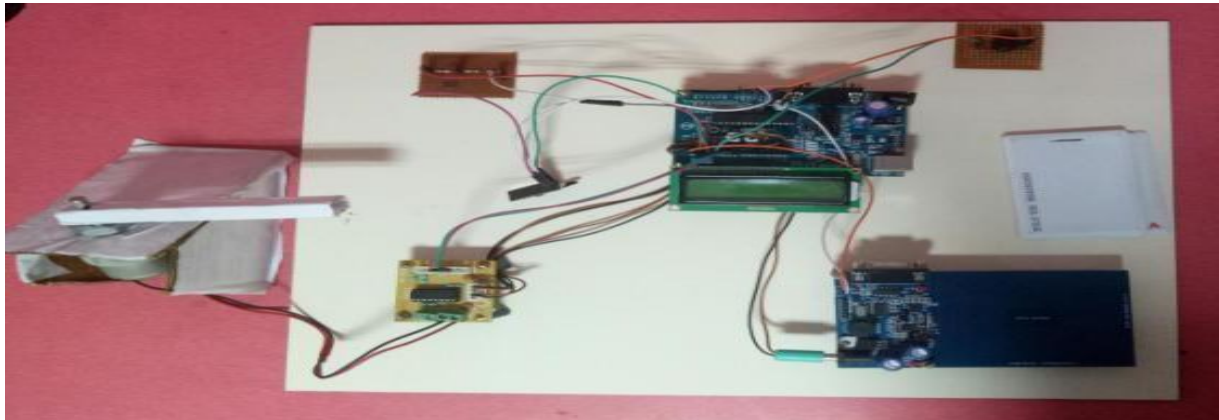

VI. CONCLUSION

The mechanized cost assortment framework will help in extraordinarily lessen the time expected to finish the most common way of giving cost receipts and empower the entire framework to be swifter. The framework additionally disposes of probability of any sort of human blunder that may be conceivable with the traditional cost assortment frameworks. There will be extraordinary decrease in fossil fuel byproducts as well as fuel utilization as the vehicle needs not to stop at the cost squares. This framework in this manner clears way to a cleaner, greener and swifter cycle when contrasted with the ongoing framework. In this paper, we have introduced the execution of IoT innovation in the utilization of cost charge framework. IoT cost assortment stations permit the traffic to stream ceaselessly and vehicle having been abstained from halting and beginning once more. This in mix with decreased fuel utilization affects climate for example contamination made will be least. Carrying out the IoT innovation is likewise not all that expensive. IoT based tollgate observing framework is an Arduino based cost assortment framework. The outcomes acquired from working have shown that the framework execution is very dependable. The framework has effectively beaten the deficiencies of the current framework by decreasing the labor at the tollgate. It gives simple method of cost assortment and support of the data..

REFERENCES

- [1] Neil Kolban, "KOLBAN'S BOOK ON ESP8266", January 2016.
- [2] Olivier Hersent, David Boswarthick, Omar Elloumi, "The Internet of Things – Key applications and Protocols", Wiley Publication, Student Edition, Reports:
- [3] Report by the govt of Maharashtra, India <http://www.fueleconomy.gov/feg/driveHabits.jsp>
Papers Presented at Conferences:
- [4] Dedy Wahyu Herdiyanto a, Endroyono b, Istas Pratomo c, "Passenger Identification and Payment System Using RFID based on board unit for Surabaya Mass Rapid Transportation", IEEE 2016 International Seminar on Intelligent Technology and application, 2016.
- [5] Ganesh K. Andurkar, Vidya R. Ramteke, "Smart Highway Electronic Toll Collection System" ISSN: 2320-9801 International Journal of Innovative Research in Computer and Communication Engineering, Vol. 3, Issue 5, May 2015.
- [6] Atif Ali Khan a, Adnan I. Elberjaoui Yakzan b, Dr Maaruf Ali c, "Radio Frequency Identification (RFID) Based Toll Collection System", IEEE 2011 Third International Conference on Computational Intelligence, Communication Systems and Networks, 2011.
- [7] Dipti Jadhav a, Manoj Sabnis b, "Open Road Tolling in India by Pattern Recognition", IEEE International Conference on Technologies for Sustainable Development (ICTSD-2015), Feb. 04 – 06, 2015, Mumbai, India, 2015
- [8] P Wenter, Siemens AG, Germany, "AUTOMATIC FEE COLLECTION ON GERMAN AUTOBAHNS - THE CHIPTICKET SYSTEM", IEEE.
- [9] Me Me Kyaw Oo a, Chaw Myat Nwe b and Hla Myo Tun c, "Satellite Dish Positioning Control by

DC Motor Using IR Remote Control”,IEEE International Journal of Electronics and Computer ScienceEngineering

[10] Abhimanyu Singh a, Pankhuri Aggarwal b, Rahul Arora c, “IoT based Waste Collection System using Infrared Sensors”, IEEE International Conference on Reliability, Infocom Technologies and Optimization (ICRITO) (Trends and Future Directions), Sep. 7-9, 2016, AIIT, Amity University Uttar Pradesh, Noida,India

[11] Mohamed Hadi Habaebi a, Nur Izzati Nabilah Bt Azizan b, “Harvesting WiFi Received Signal Strength Indicator (RSSI) For Control/Automation System In SOHO Indoor Environment with ESP8266”, International Conference on Computer & Communication Engineering,IEEE.

[12] Niharika Gour a, Preet Jain b, “ESP8266 Based Production Monitoring System for Sewing Machine in Garment Industry to Evaluate OEE”, International Journal of Innovative Research in Computer and CommunicationEngineering.

[13] Manan Mehta a, “ESP 8266: A BREAKTHROUGH IN WIRELESS SENSOR NETWORKS AND INTERNET OF THINGS”, IJECET, Volume 6, Issue 8, Aug 2015, pp.07-11.

[14] Krupal Kachhia Patel a, Jignesh Patoliya b, Hitesh Patel c, “Low Cost Home Automation with ESP8266 and Lightweight protocol MQTT”, Transactions on Engineering and Sciences ISSN: 2347-1964 , 2347-1875 Vol.3, Issue 6, October- December 2015.

[15] S. V. Devika a, Sk. Khamuruddeen 2, Sk. Khamurunn 3, isa, Jayanth Thota 4, Khalesha Shaik 5, “Arduino Based Automatic Plant Watering System”, International Journal of Advanced Research in Computer Science and Software Engineering.

[16] Prof. Rajesh Math a, Dr. Amol Goje b, “Impact of IOT (Internet Of Things) on growth of Cloud Applications in Service Sector with specific reference to Western Maharashtra”,IEEE International Conference on Cloud ComputinginEmerging Markets, 2016.

[17] William M.S. Stout a, Vincent E. Urias b, “Challenges to Securing the Internet ofThings”.

[18] Akshay Kumar a, Nanjangud C. Narendra b, Umesh Bellur c, “Uploading and Replicating Internet of Things (IoT) Data on Distributed Cloud Storage”, IEEE 9th International Conference on Cloud Computing.2016.

[19] Zhongxian Li a, Guili Han b, “Information management system of public facilities based on Internet of things technology”, International Conference on Smart City and Systems Engineering, 2016.

[20] Radia BELKEZIZ a, Zahi Jarir b, “A Survey on Internet of Things Coordination”, IEEE 201 Datasheets:

[20] F. Don, “Electronic Toll Collection: An Introduction and Brief Look at Potential Vulnerabilities,” in SANS Institute info Sec Reading Room, 1.4b ed.2004.

[21] Radhika, “ElectronicToll Collection System”.

Raadhikaa et al, UNIASCIT, Vol 1 (1), 2011, 05-08

[22] Khali, C.W. Michael, H. Shahriyar “Toll Collection Technology and Best Practices”, Project 0-5217:Vehicle/License Plate Identification for Toll Collection Application, January2007.

[23] Ajit S.Mali, Komal Barge, “Electronic Toll Collection System using RFID” published at International Journal of Innovative Research in Science, Engineering and Technology(IJIRS), Vol. 6, Issue 5, May2017.